
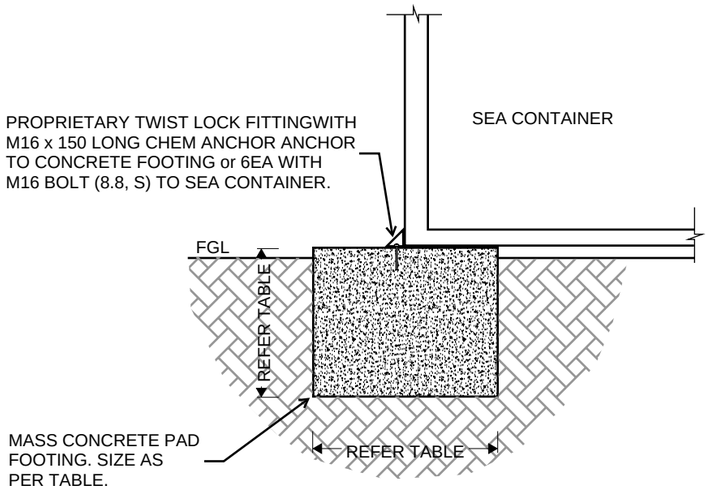


PAD FOOTING TO SEA CONTAINER DETAIL
SCALE 1:20 @ A3


PAD FOOTING TABLE				
	SOIL CLASS			
WIND CLASS		A	S	M
	N1	PF1	PF1	PF3
	N2	PF2	PF2	PF3
	N3	PF3	PF3	PF3

PAD FOOTING SCHEDULE	
PF1	Ø450x300mm DEEP
PF2	Ø600x400mm DEEP
PF3	Ø600x600mm DEEP


NOTE: THIS TABLE IS BASED ON MINIMUM SOIL ANGLE OF FRICTION OF 30 DEGREES, MIN SOIL UNIT WEIGHT OF 18kN/cum, AND MIN SOIL BEARING CAPACITY OF 100kPA.



8 -10ft SEA CONTAINER FOOTING PLAN
SCALE 1:100 @ A3

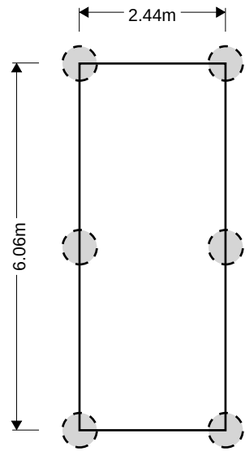

20ft SEA CONTAINER FOOTING PLAN
SCALE 1:100 @ A3

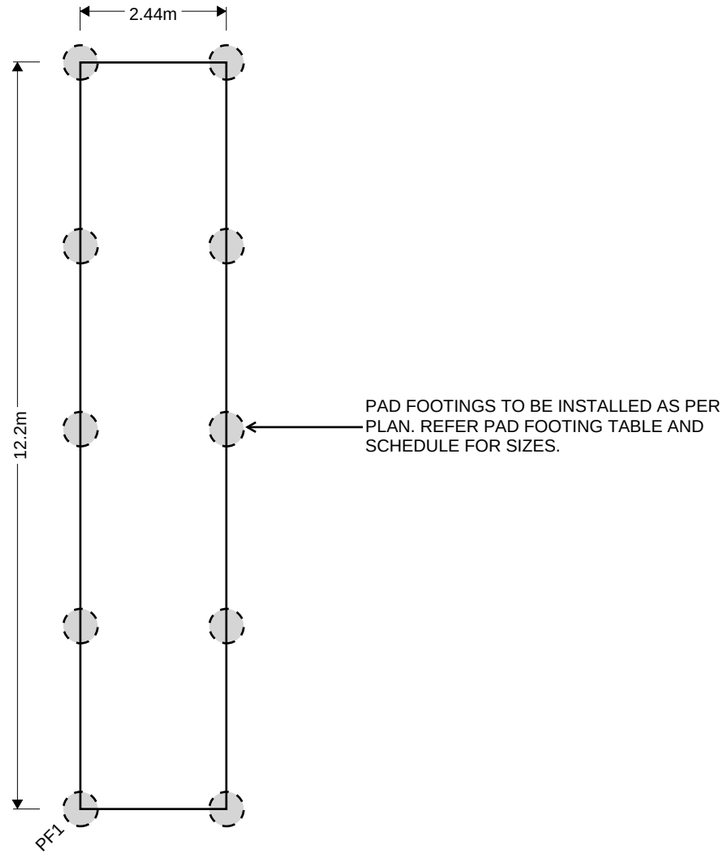

40ft SEA CONTAINER FOOTING PLAN
SCALE 1:100 @ A3

REV			
A	ISSUED FOR GENERAL USE	L.T.	03/11/26
		DESIGN	DATE

LUKE TULLOCH ENGINEERING
CIVIL AND STRUCTURAL ENGINEERING
E: luke@lteng.com.au
P: 0437606887
www.lteng.com.au

ENGINEERS AUSTRALIA
LUKE TULLOCH MEDIGOVICH
MIE AUST.
MEMBERSHIP No. 5384680
INSTITUTE OF ENGINEERS AUSTRALIA
3/11/2026

CLIENT: SHIRE OF JERRAMUNGUP

PROJECT LOCATION: SHIRE OF JERRAMUNGUP

SHEET: S01
SHIPPING CONTAINER FOOTINGS DETAILS

JOB NO: 2687

A 3